


# IP68 Design



Coil	Power VA for 50 Hz	Consumption Watt
.032	24/15	11
.012	35/24	18,5
.702	incl. rectifier	25
.802	incl. rectifier	24
.322	incl. rectifier	30
.242	incl. rectifier	46
.272	incl. rectifier	100
.352	incl. rectifier	150
.402	incl. rectifier	250

## Encapsulated coil with IP68 for permanent underwater use (Only for 2/2-Way solenoid valves)

- Solenoid valves: all control types
- Pressure range: vacuum to 900 bar
- Dimensions: 0.5-300 mm
- Cable length: 3 m as standard  
5 m cable or 10 m cable on request
- Valves available in nickel-plated version
- With flange or thread connection available

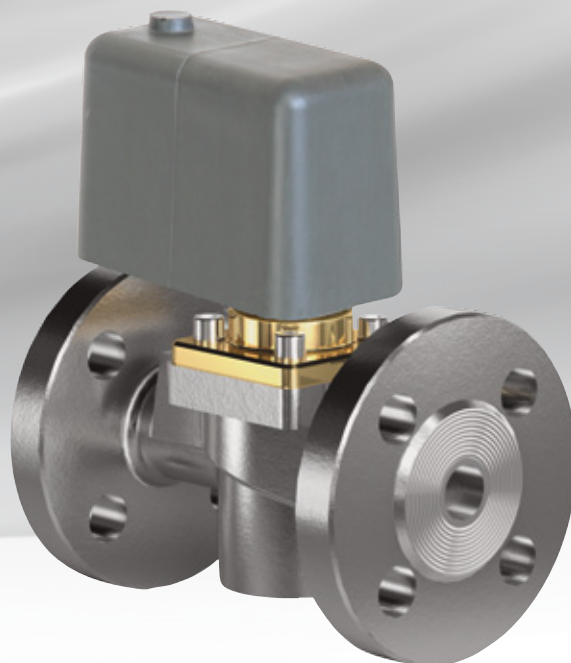

GSR Ventiltechnik GmbH & Co. KG

Im Meisenfeld 1 • D-32602 Vlotho  
P.O. Box 2060 • D-32595 Vlotho

Phone +49 5228 779-0

info@ventiltechnik.de

Fax +49 5228 779-190

www.ventiltechnik.de

Innovative Valve Technology